




ORDER and CONTACT FORM

PRODUCTINFORMATION

	Definition HR/AR/BH/AW e.g. A1.0/28/12/+4								
Locking ring A [HR]	0,8	1,0	1,2	1,5	2,0	2,5	3,0	4,0	Customer sheet metal thickness
Locking ring B [HR]	0,8	1,0	1,2	1,5	2,0	2,5	3,0	4,0	Customer sheet metal thickness
Stop washer [AR]	Ø28	Ø30	Ø35	Ø40					
Component height [BH]	12	14	16	18	20	22	24	...	
Compensation way [AW]	4	6	8	10	12	14	16	...	



Corrosion protection DIN 50021 SS: 72/240h
Applicable for screws M8 8.8,
we recommend screws with dog point.

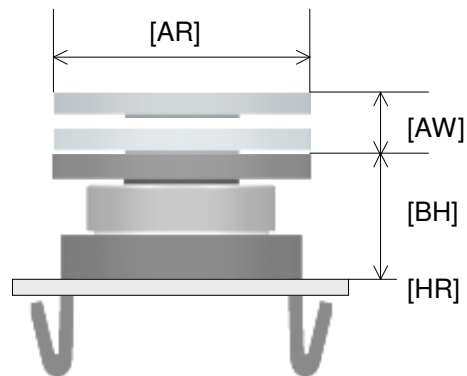

CONTACTINFORMATION

Company:

Name:

Address:

Fon.:

VAT Nr.:

Email:

Please reply the following information:	Brochure	Movie CD-Rom	Sample parts	Meeting appointment
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

PROJECTINFORMATION


Volume [pieces/year]:

Application / Place of installation:

Start of production [month/year]:

Nomenclature [HR/AR/BH/AW]: 1. ... / ... / ... / ... 2. ... / ... / ... / ...

Shipping address:



MINIMUM PURCHASE QUANTITY AND PRICING ON DEMAND